

# Modular Cooking – Oriental Gas Teppanyaki Jumbo Griddle

#### **TP-JG-15/G**



\*Due to routine technical improvement, the photograph shown may not represent the latest design of the products.

#### **AVAILABLE MODEL**

1. TP-JG-15/G

#### DESCRIPTION

Gas Teppanyaki with 21 kW power rate. Burner atmospheric supplied by a mixture of liquid gas and air or natural gas and air. Main Burner ignition carried by Pilot Burner and equipped by Safety Thermocouple.

ITEM#	:
MODEL#	<b>:</b>
NAME	:

#### **MAIN FEATURE**

SN

- Heavy duty gas Teppanyaki built on assembled frame construction for flexibility.
- Three heating zones with 7 kW each.
- Multi burners controlled by gas valve.
- Removable top frame.
- Removable griddle plate.
- Square drain hole designed for Teppanyaki scrapper.
- Removable grease container is provided for easy cleaning.
- Griddle made by 20 mm thick S355JR steel.

#### **CONSTRUCTION**

- Fully Stainless Steel Exterior.
- 770mm working depth.
- Large capacity grease container.
- Adjustable legs 40 x 40 mm.
- Griddle dimension: 1204x554x30/150 mm

#### **INCLUDED ACCESSORIES**

SS handrail.

#### **OPTIONAL ACCESSORIES**

N/A

**APPROVAL** 

PT. NAYATI INDONESIA www.nayati.com nayati@nayati.com The company reserves the right to make modifications to the products without prior notice.

All information correct at time of printing.

2019.02.12

## **FRONT** ⑥• (0)● (0)● Œ) 45

#### GAS

Gas Consumption 21 kW


(18,060kCal/h)

Gas Type Option G30

**Gas Connection** 3/4"

LPG Gas Pressure G30: 28 mbar

**TOP** 



#### **KEY INFORMATION**

Unit dimension (WxDxH) 1440x770/895x850 mm

Griddle dimension (WxDxH): 1200x550x20 mm

Direct heat emission 7.35 kW

8.40 kW Latent heat emission

Steam emission 12.34 kg/h

Net weight 238 kg

### **PACKING DETAILS**

Shipping width 1490 mm


Shipping depth 925 mm

Shipping height 1040 mm

Shipping volume 1.43 m<sup>3</sup>

Gross weight 296 kg

# SIDE

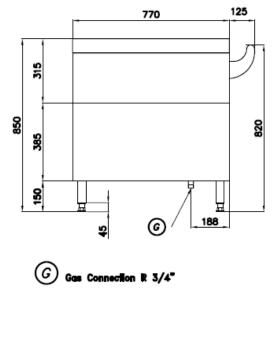

**APPROVAL** 

\* Overall Dimension in mm